


# PoS Protocol Analyzer (Legacy Product)

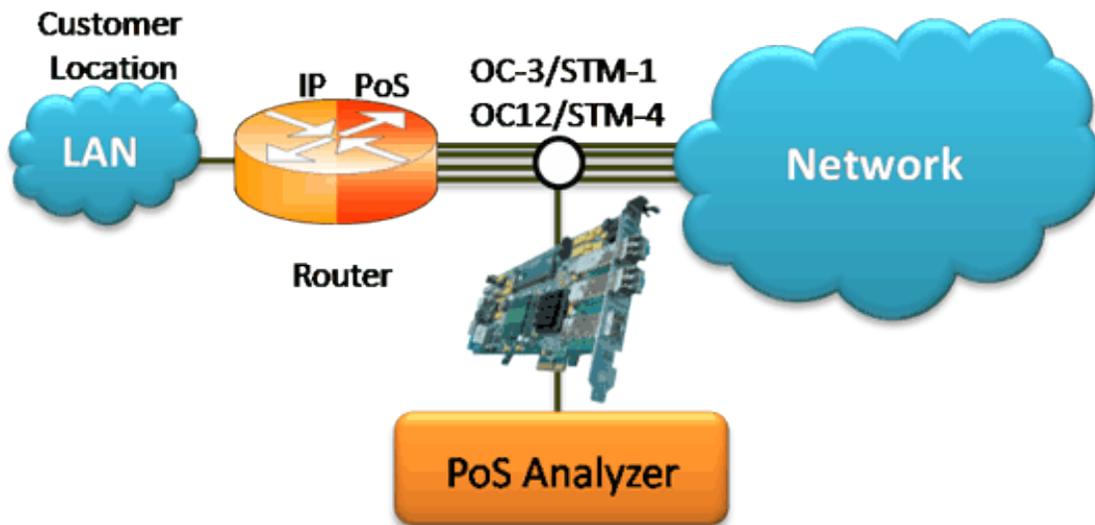

## Overview

The PoS Analyzer captures a host of PoS protocols exchanged between the two nodes over SONET, and provides useful analysis, which includes distribution of protocols, protocol fields, frame lengths, and frame status. User can obtain detailed analysis of the protocol and can perform various statistics measurements.

PoS analyzer also supports **Packet Data Analysis** module (requires additional license) to perform detail analysis of MLPPP packets over IP and segregates them into SIP / H323 / MEGACO / MGCP / T.38 fax calls.

GL Communications supports the following types of PoS Analyzers:

- Real-time PoS Analyzer with Packet Data Analysis
- Offline PoS Analyzers

For more details, refer [PoS Protocol Analyzer](#) webpage.

## Main Features

### Display Features

- Displays Summary, Detail, Hex-dump, and Statistics Views
- Detail View:
  - Displays decodes of a user-selected frame from the summary view
  - Provides options to display or hide the required protocol layers
  - Contents of this view can also be copied to clipboard
- Summary View displays Dev #, Time Slot, Layer 3 Protocol, LCP message type and higher protocol specific information like Destination and Source IP address, Destination and Source TCP as well as UDP port details, HTTP/FTP message type, and so on in a tabular format
- Statistics View displays statistics based on frame count, byte count, frames/sec, bytes/sec etc for the entire capture data
- Any protocol field can be added to the summary view, filtering, and search features providing users more flexibility to monitor required protocol fields



818 West Diamond Avenue - Third Floor, Gaithersburg, MD 20878, U.S.A  
(Web) [www.gl.com](http://www.gl.com) - (V) +1-301-670-4784 (F) +1-301-670-9187 - (E-Mail) [info@gl.com](mailto:info@gl.com)

## Main Features (Contd.)

### Supported Protocols

- PoS, IPCP, BCP, BPDU, POP, CHAP, HTTP, SNMP, STUN, FTP, DNS, and DHCP

### Filtering / Search

- Comprehensive hardware based filtering
- Supports software based search and filtering capabilities

### Capturing Streams

- Streams can be captured on the selected ports (1 and 2).
- Ability to capture and decode both PoS routed protocols, PoS bridged protocols

### Export Options

- Exports Summary View information to a comma delimited file for subsequent import into a database or spreadsheet
- Capability to export detailed decode information to an ASCII file

### Remote Monitoring

- Remote monitoring capability using GL's Network Surveillance System

### Additional Features

- Ability to test and perform numerous measurements across WAN- LAN or LAN-LAN connection
- Ability to test and analyze PoS protocol in synchronous environment
- User can decode frames from the recorded trace files and can be played back using "Rx Packets to File" application

## PDA Main Features

- Supported protocols:
  - SIP (Session Initiation Protocol RFC 2543 and RFC 3261), MEGACO, MGCP, H323/H225, T.38 Fax, and RTP
- Full RTP Analysis with audio capture/playback supported for all common codecs
- Provides the registration summary of each SIP registration including the user agent, registrar, status, registration request delay (RRD), etc. and graphical view of the active registrations and registration trace of each registration
- Provides Video QoS Statistics such as Missing Packets, Delay, Gap, Video Frame Count, Media Delivery Index (MDI- (Delay Factor : Media Loss Rate)), and Frame Rate, and more
- Supported Audio and Video codecs:
  - Mulaw, Alaw, G.726 (40/32/24/16 kbps), G.726 with VAD, GSM610, G729, G729B, AMR (Wide and Narrow band codec), ILBC (20 , 30 msec), SPEEX, EVRC, EVRCB, H263+, and H264

## Summary, Detail, and Hex dump Views

The Summary pane displays Dev#, Frame #, Time relative, Len, Error, Layer 3 protocol, LCP code, IPCP code, BCP code, PoS Message type, Source/Destination IP address, TCP Source/Destination Port, UDP Source/Destination Port, Message Type, and so on. The user can select a frame in Summary View to analyze and decode each frame in the Detail View. The Hex dump view displays the frame information in HEX and ASCII formats. The contents of Detail and Hex dump view can also be copied to clipboard.

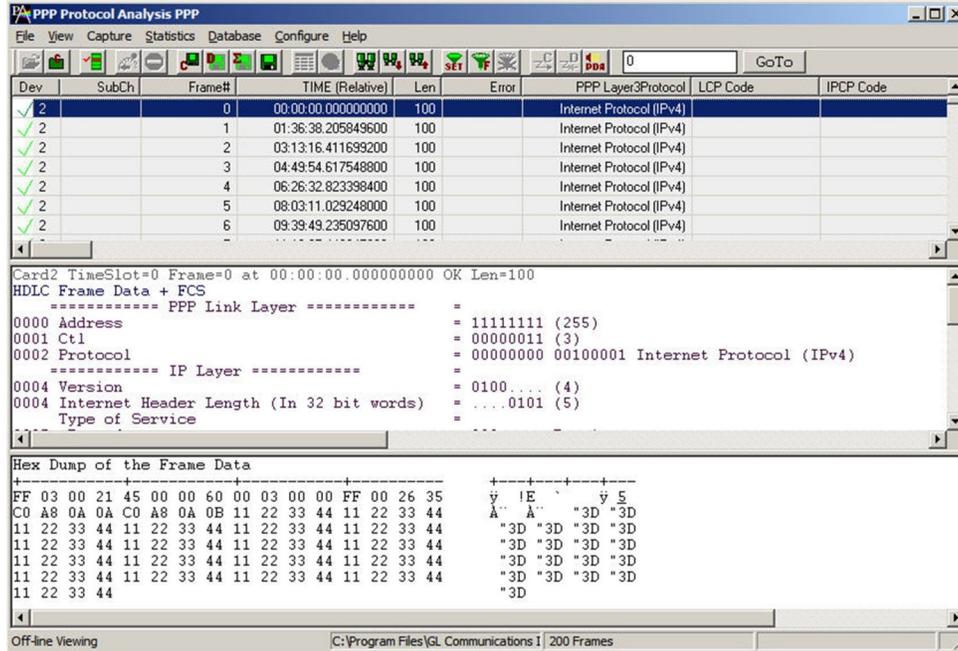


Figure: Summary, Detail, and Hex dump Views

## Real-time and Offline Analysis

Multiple ports can be selected for a single instance of analyzer to capture the frames simultaneously. The recorded trace file can then be analyzed offline and exported to ASCII file, or printed. The real-time capturing requires users to specify ports and Frame Check Sequence (FCS).

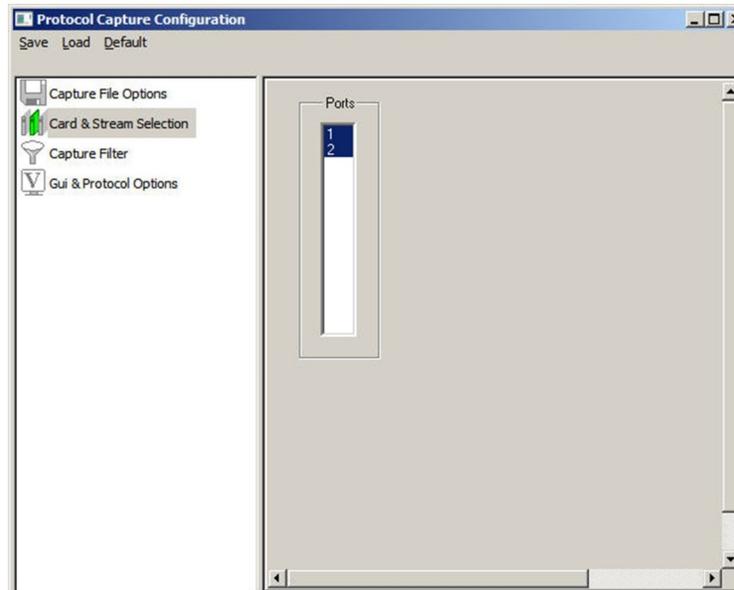


Figure: Stream / Interface Selection

## Filtering and Search

Users can record all or filtered traffic into a trace file. Filter and search capabilities adds a powerful dimension to the PoS analyzer. These features isolate required frames from the captured frames in real-time, as well as offline. In real-time capturing, filter based on length of frames can be set. The frames can be also be filtered after completion of capture based on Frame Number, Time, Length, Error, Layer3 Protocol, LCP Code, IPCP code, Seq no, PoS Message type, and so on.

Similarly, search capability helps user to search for a particular frame based on specific search criteria.

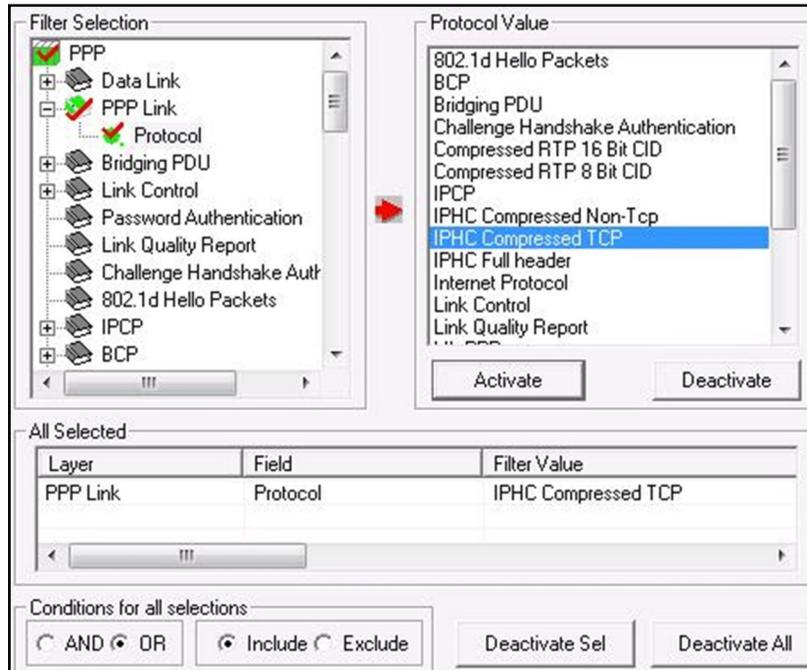


Figure: Real-time and Offline Filter

## Statistics View

Statistics is an important feature available in PoS analyzer and can be obtained for all frames both in real-time as well as offline mode. Various statistics can be obtained to study the performance and trend in the PoS network and it is based on protocol fields and different parameters.

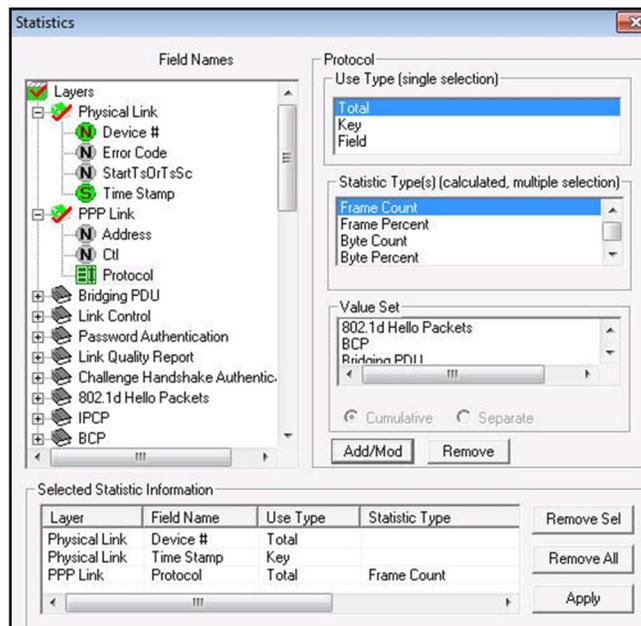


Figure: Statistics Definition Dialog

## Packet Data Analysis (PDA) – Summary View

### Main Features

- Call Quality Of Service (QOS) for all calls with E-Model based (G.107) Mean Opinion Score (MOS) and R-factor with individual and summary statistics presented in graphical and tabular formats
- Calculates minimum, maximum, and average Round Trip Delay (RTD) values for SIP calls
- Graphs are provided for key values to give a pictorial representation of the statistics; some of the graphs available are – active calls, average jitter, E-Model MOS/R-Factor/Packets Discarded, RTP packets summary, ladder diagram for T.38 traffic, and call signaling
- Displays summary of signaling, audio, and video (for all video calls) parameters of each call in call summary
- Generates alert summary when particular vital parameters go beyond a specified value

### PDA - Summary View

TA Summary view displays summary of data transmission in each direction including calling number, called number, duration, max/min RTD, average RTD and so on. It includes separate statistical counts on total packets, calls, failed calls for SIP, H323, MEGACO, and RTP based calls. The user can get the statistics of active calls, purged calls, and so on.

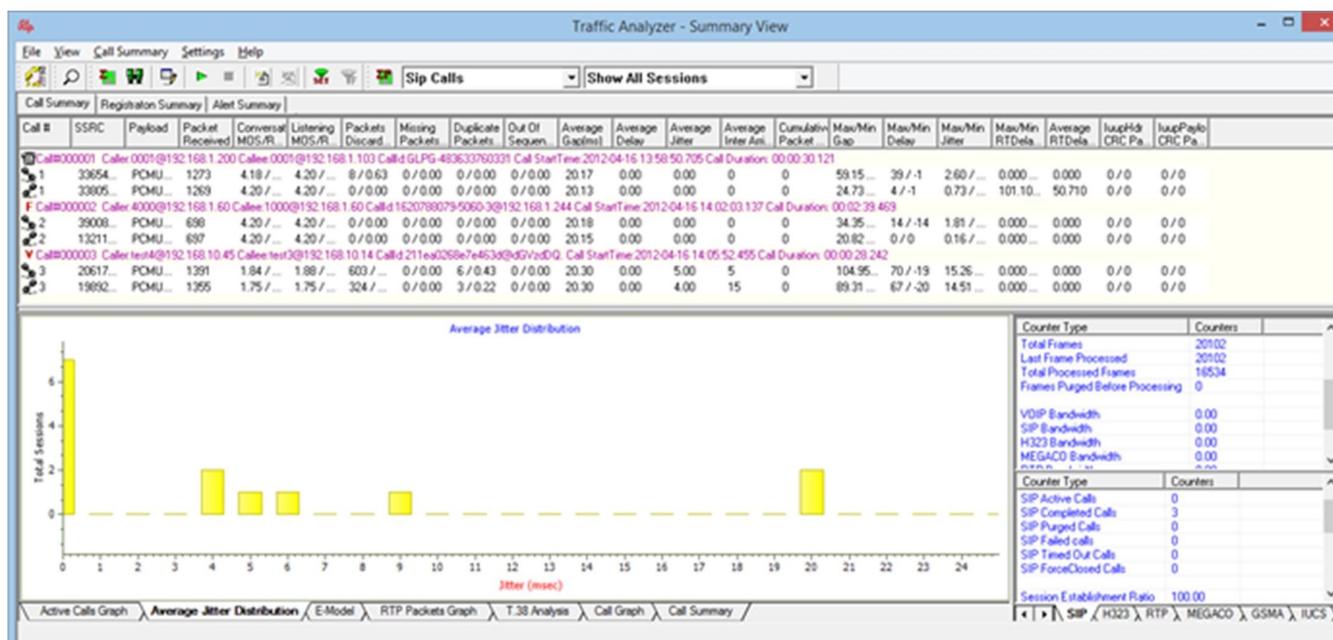


Figure: Traffic Analyzer Summary View

### Call Summary – Signaling, Audio, and Video Parameters

The Call Summary displays the signaling, audio, and video parameters of each call for SIP, RTP, MEGACO, and H323 in a tabular format. Video QoS parameters such as Codec Info, Frame Rate, Missing Packets, Delay, Gap, Video Frame Count, Out Of Sequence count, Duplicate Packets count, Media Delivery Index (MDI), etc. are displayed for all video calls with H.263 and H.264 codecs.

Call #	SSRC	Payload	Packet Received	Conversational MOS/R	Listening MOS/R	Packets Discard	Missing Packets	Duplicate Packets	Out Of Sequen.	Average Gaps(ms)	Average Delay	Average Jitter	Average Inter Arr.	Cumulative Packet	Max/Min Gap	Max/Min Delay	Max/Min Jitter	Max/Min RTDelta
1	58455...	SPEE...	3147	4.04 / ...	4.06 / ...	33 / 1...	0 / 0.00	0 / 0.00	0 / 0.00	20.54	1.00	6.00	3	0	164.14...	288 / ...	15.30 ...	0.000 ...
1	67157...	SPEE...	3144	4.01 / ...	4.06 / ...	35 / 1...	0 / 0.00	0 / 0.00	0 / 0.00	20.58	1.00	8.00	3	0	143.87...	247 / ...	16.07 ...	0.000 ...
1	42571...	h263-2...	2297	n/a	n/a	n/a	0 / 0.00	0 / 0.00	0 / 0.00	125.85	38.00	5.00	n/a	0	11367...	1406 / ...	125.06 ...	n/a
1	11255...	h263-2...	2854	n/a	n/a	n/a	0 / 0.00	0 / 0.00	0 / 0.00	103.06	34.00	4.00	n/a	0	228.48...	1445 / ...	128.48 ...	n/a

Signalling Parameters	Value	Audio Parameters	Value	Video Parameters	Value
Caller	0001@192.168.1.169	Sic RTP Channel	192.168.1.231 : 8090	Sic Video Channel	192.168.1.231 : 8092
Callee	0001@192.168.1.254	Sic Media Type	SPEEX_wB/16000	Sic Media Type	h263-2000/90000
Callid	7e5d63185687773@oVh2G	Sic SSRC	58455907	Sic SSic	4257195096
Call Status	Terminated	Sic Packets Count	3147	Sic Packet Count	2297
Call Start Time	2010-12-08 14:18:07.972	Sic Packets Lost / (%)	0 / 0.00	Sic Missing Packets / (%)	0 / 0.00
Call Stop Time	2010-12-08 14:19:31.857	Sic Duplicate Packets / (%)	0 / 0.00	Sic Duplicate Packet / (%)	0 / 0.00
Call Duration	00:01:04.000489	Sic Out of Sequence Packets / (%)	0 / 0.00	Sic Out of Sequence / (%)	0 / 0.00
Call Terminator	Caller	Sic Conversational MOS/R Factor	4.04 / 100	Sic Video Frame count	512
Call Failure Reason	Caller	Sic Listening MOS/R Factor	4.06 / 101	Sic Frame Rate(Frames/sec)	8
Session Request Delay (msec)	9794.350	Sic Discarded Packets / (%)	33 / 1.05	Sic AvgDelay	38.00
Session Disconnect Delay (msec)	53.444	Sic Average Inter Arrival Jitter (RTCP)	3	Sic AvgGap	125.85
		Sic Average Jitter	6.00	Sic MDI (DF.MLR)	116.38 : 0
		Sic Average Delay	1.00	Sic AvgMDI(DF.MLR)	16.82 : 0
		Sic Average Gap	20.54		
		Dest RTP Channel	192.168.1.254 : 10574	Dest Video Channel	192.168.1.254 : 10576
		Dest Media Type	SPEEX_wB/16000	Dest Media Type	h263-2000/90000
		Dest SSRC	671575365	Dest SSic	112553973
		Dest Packets Count	3144	Dest Packet Count	2854
		Dest Packets Lost / (%)	0 / 0.00	Dest Missing Packets / (%)	0 / 0.00
		Dest Duplicate Packets / (%)	0 / 0.00	Dest Duplicate Packet / (%)	0 / 0.00
		Dest Out of Sequence Packets / (%)	0 / 0.00	Dest Out of Sequence / (%)	0 / 0.00
		Dest Conversational MOS/R Factor	4.01 / 99	Dest Video Frame count	581
		Dest Listening MOS/R Factor	4.06 / 101	Dest Frame Rate(Frames/sec)	9
		Dest Discarded Packets / (%)	35 / 1.12	Dest AvgDelay	34.00
		Dest Average Inter Arrival Jitter (RTCP)	3	Dest AvgGap	103.06
		Dest Average Jitter	8.00	Dest MDI (DF.MLR)	128.18 : 0
		Dest Average Delay	1.00	Dest AvgMDI(DF.MLR)	19.69 : 0
		Dest Average Gap	20.58		

Figure: Signaling, Audio, and Video Parameters

### Graphs in PDA – Summary View

**Active Calls** – A line graph, depicting the Number Of Calls Vs Time.

**Average Jitter Distribution** – Distribution of the Average Jitter values across the Total Sessions

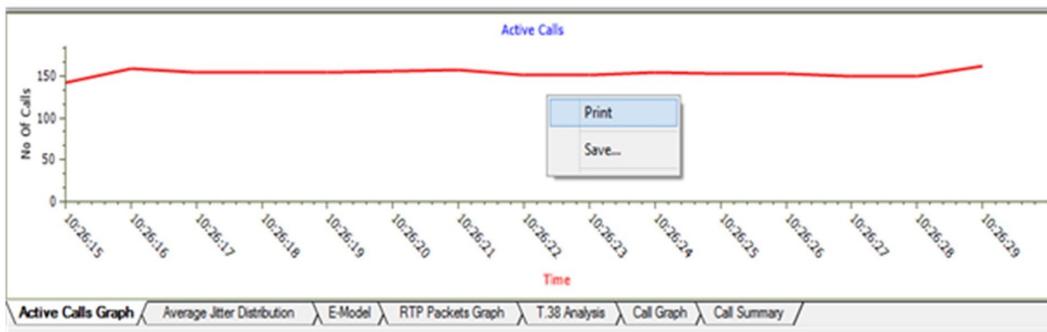


Figure: Active Call Graph

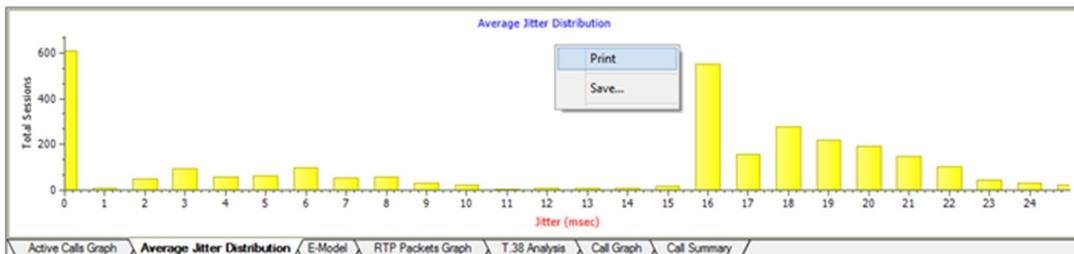


Figure: Average Distribution Graph

### Graphs in PDA – Summary View (Contd.)

**E-model** - This graph provides R-factor, MOS and packets discarded against number of sessions- all these three graphs show statistics of terminated calls.

- **R-Factor** – A bar Graph that plots R-Factor across No of Sessions
- **MOS** – A bar Graph that plots Mean Opinion Score values across No. of Sessions
- **Packets Discarded** – A bar Graph that plots Packets Discarded across No. of Sessions
- **RTP Packets Graph** - Plots and compares out of ordered packets, missing packets and duplicate packets against Total Audio Packets

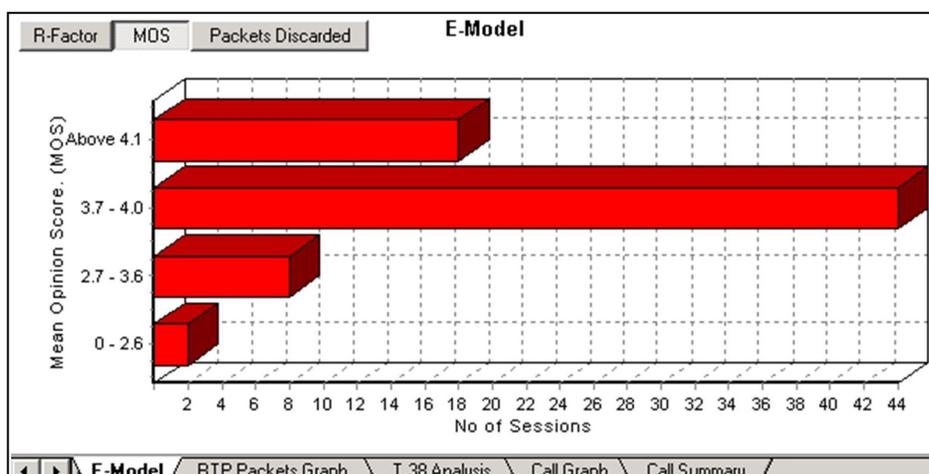


Figure: E-Model Graph

**T.38 Analysis** - Supports decoding, and monitoring of Fax (T.38 data) over VoIP. Identified T.30 messages is displayed in T.38 ladder diagram.

**Call Graph** - Displays the message sequence of captured VoIP (SIP or MEGACO) calls.

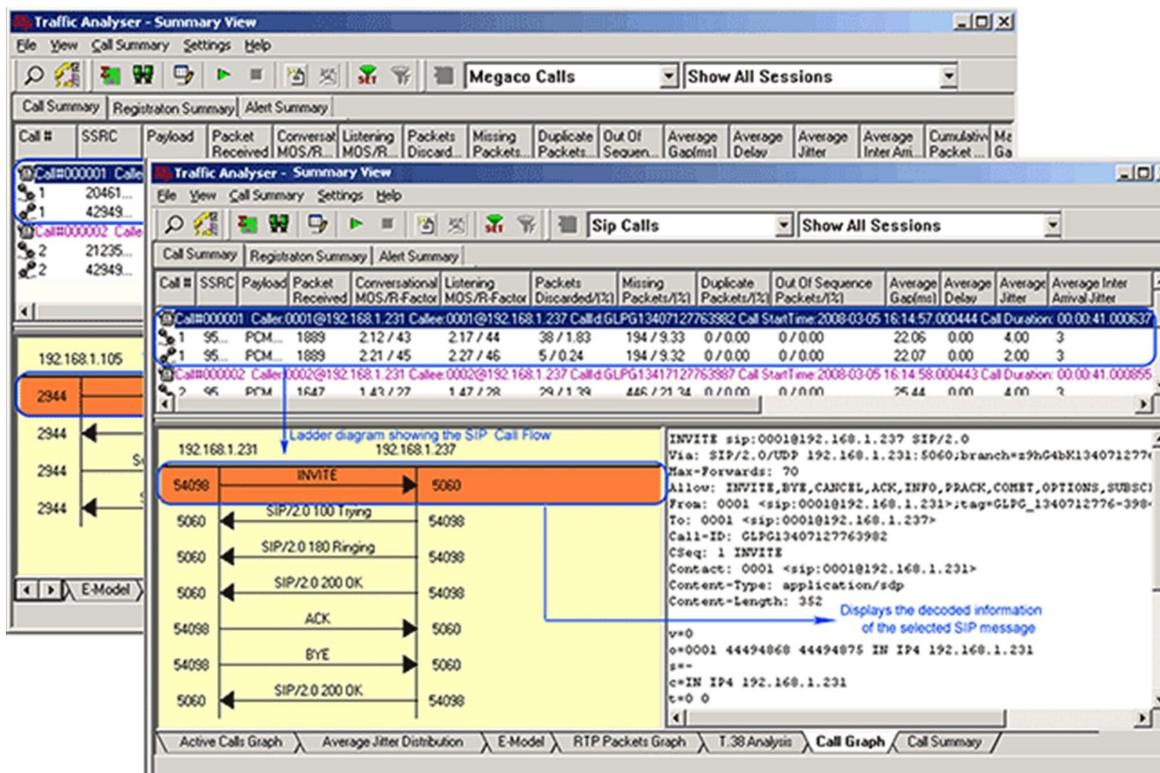


Figure: T.38 analysis and Call Flow Ladder Diagram

# Packet Data Analysis (PDA) – Detail View

## Main Features

- Provides further detail statistics on the two (or one) RTP sessions that are part of a single call
- RTP sessions include the graphical representation of R-Factor statistics which includes Quality Metrics with R-Factor and MOS Factors graphs, Jitter Buffer Statistics, Degradation Factor, Burst Metrics, and Delay Metrics
- Codecs: Mulaw, Alaw, G.726 (40/32/24/16 kbps), G.726 with VAD, GSM610, G729, G729B, AMR (Wide & Narrow band), ILBC (20 , 30 msec), SPEEX, EVRC, EVRCB, H263+, & H264

## PDA – Detail View

This display assists in any comparisons that are to be made between the two RTP sessions of a call. Each frame of the selected session is dissected and its contents are displayed in a tabular form for easier viewing and comparisons. Vital aspects from the RTP frame needed for close analysis are included in the table.

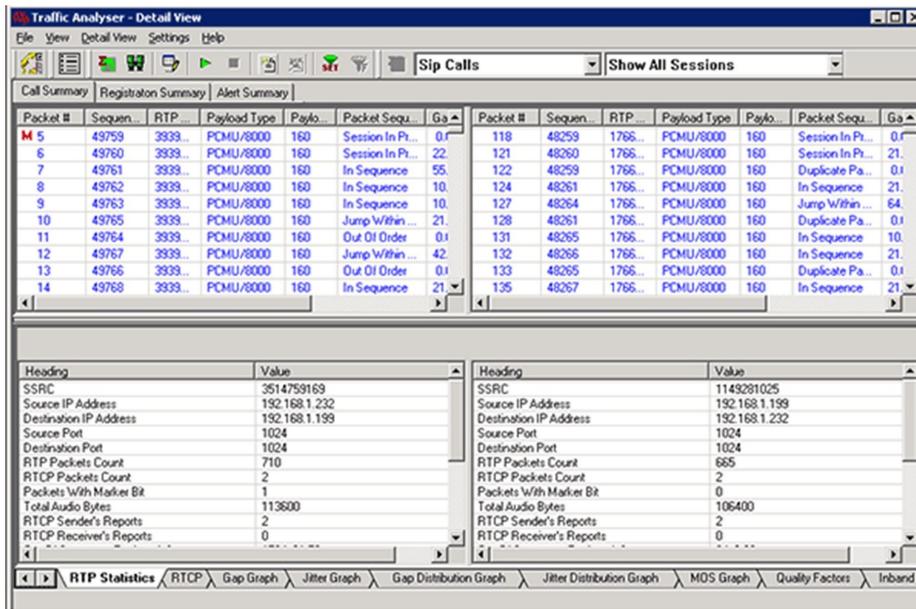


Figure: Traffic Analyzer Detail View

## Graphs in PDA – Detail View

**Gap/Jitter graphs** – Plots the Gap (in milliseconds)/Jitter versus the packet number

**Gap Distribution Graph** – Number of packets with a particular value of gap is plotted against the (gap) value

**Jitter Distribution Graph** – Number of packets with a particular value of jitter is plotted against the jitter value

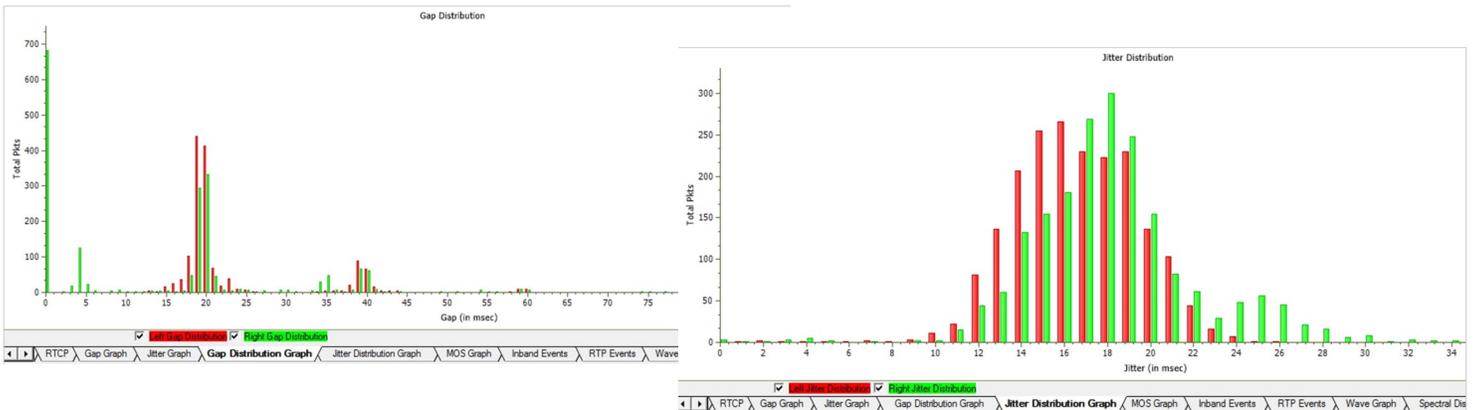


Figure: Gap/Jitter Distribution Graph


**Graphs in PDA – Detail View (Contd.)**

**MOS Graph** – Plots Mean Opinion Score values throughout the duration of the call.

**Quality Factor** – Plots and compares Good Quality packets, Packets Discarded, and Echo level against total Packets for each individual session.

**Wave graph** – Displays the amplitude of the incoming signal in a selected call as a function of time.

**Spectral Display** – Displays the power of incoming signal while the capturing is going on as a function of frequency.

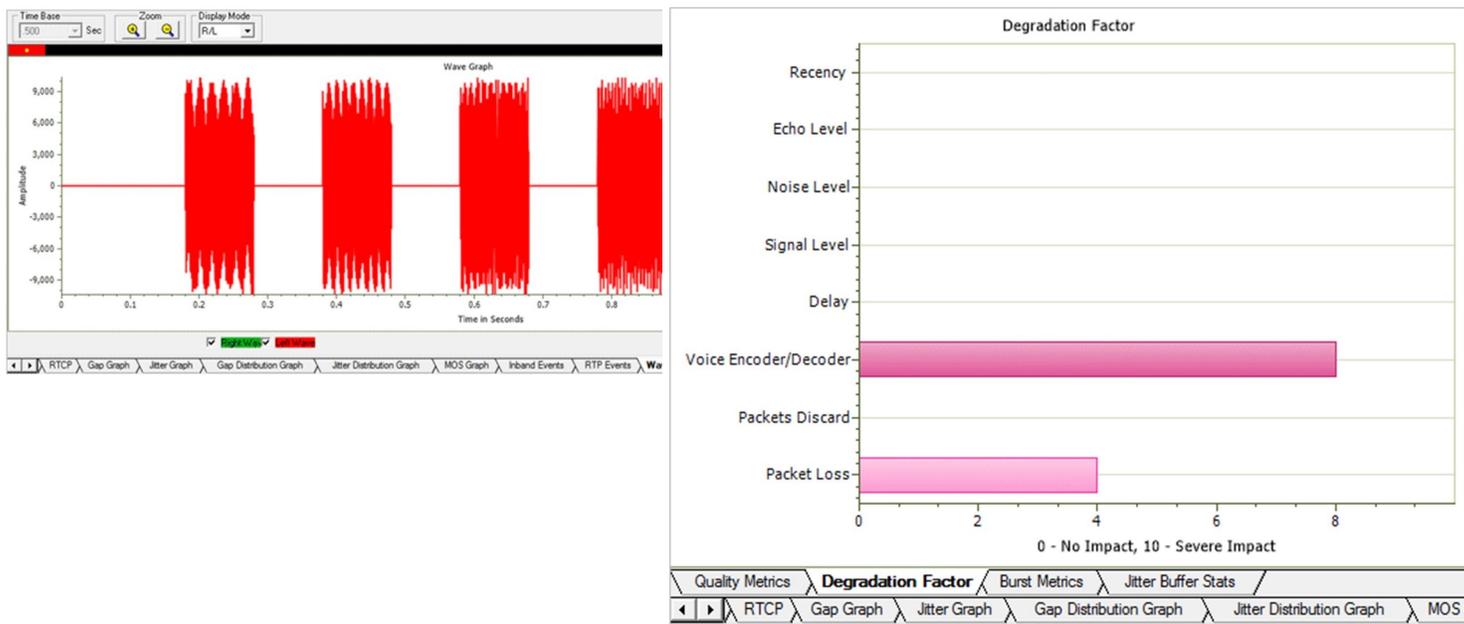

**Figure: Wave Graph and Quality Factors**

**Quality Metrics based on E-model** includes R-Factor and MOS Factor. R-Factor bar graph will display statistics such as R Listening, R Conversational, R-G107, and R-Nominal values.

**MOS Factor** bar graph will display statistics such as MOS CQ, MOS PQ, and MOS Nominal values during a call.

**Degradation Factor** – A pie chart plots and compares different statistics such as Good Quality, Packets discarded, Echo level, Packet loss, and Regency against total Packets for each individual sessions.

**Jitter Buffer Statistics** – A pie chart plots and compares packets received, packets discarded and packets lost against total Packets for each individual sessions. Also provides a tabular data on average.



**Figure: Jitter Buffer Statistics**

## Other Features in PDA

### Play Audio, Write to File, and Record Video

The Play Audio plays the selected call to the PC speaker. Write to File is similar to the Play Audio option. The basic difference being that the output is written to a file instead of playing to the speaker.

PDA can monitor video calls and display both audio and video RTP streams in summary view. Users can record video calls to a file in QuickTime format, which can be viewed by VLC player.

Record Video option is available for both auto detected RTP calls and SIP calls. Supported video codecs are: H263++ (CIF 190/350 kbps, 512 kbps, QCIF 64 /80/128 kbps) and H264 is an industry standard for video compression, the codec offers better compression performance over previous standards.

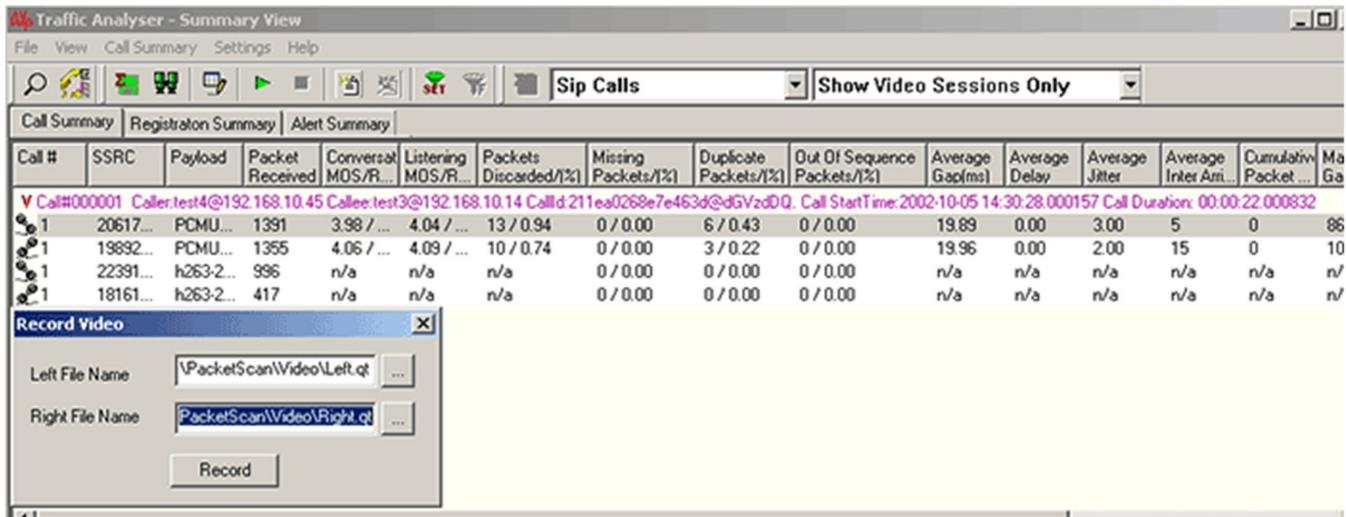


Figure: Record Video

### Save call

The Save Call feature enables the user to save a particular call either in GL's proprietary \*.HDL file format or in Ethereal \*.PCAP file format. Call Summary details could also be saved for a particular call and this will be saved as a \*.rtf file. This is especially useful to get data from real-time traffic locations to the lab for detail analysis of a flawed call.

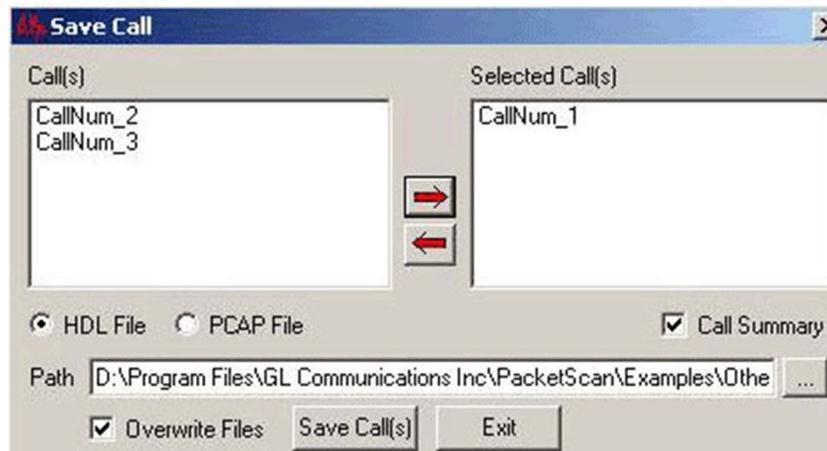


Figure: Save Call

## Other Features in PDA (Contd.)

### RTP/RTCP Statistics and Inband Events

The user can get the complete details of a single selected call such as Total Packets count, SSRC, RTP packet count, RTCP packet count, Total Audio bytes. Inband Events display inband DTMF and MF digits as they are received with details such as Timestamp, Type, Event, On-Time, Power, Freq1 / Power1, Freq2 / Power2.

### Triggers and Action Settings

Triggers and Action Settings allow the user to filter calls based on certain SIP, RTP, MEGACO, and H323 parameters followed by a set of actions for the completed calls. The filtered file can be saved in either GL's proprietary HDL file format or Ethereal PCAP file format. Additionally, a summary of call signaling and audio parameters can be saved as \*.rtf file. The actions include saving call to a file, recording audio to a file, sending an email, posting alert summary, viewing custom calls in summary view, creating Call Detail Records in CSV file format, and extracting Fax from calls in TIFF format.

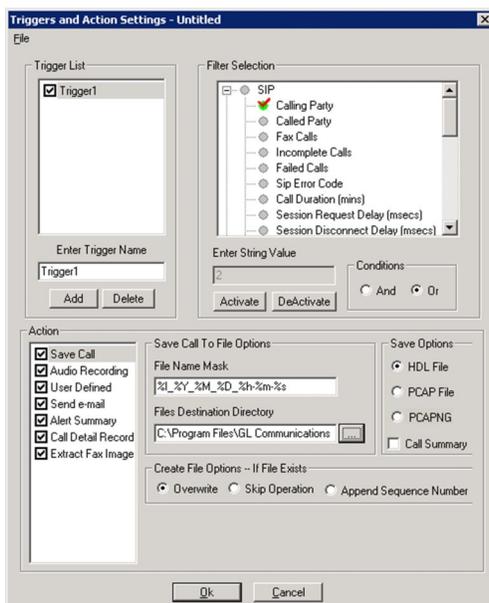


Figure: Trigger and Action Settings

### Alert Summary

PDA generates alerts when particular vital parameters go beyond a specified value and display in Alert Summary table. The user can specify the criteria based on which the alerts are to be generated. The tab provides an active list of the alerts that have occurred during the test session in tabular columns.

Call#	Protocol	Message	Type	Threshold	Value	Caller	Callee	Callid
1	SIP	mos value between 3 to 4	Warning	2.00-4.00	3.57	0005@192.168.1.236	0005@192.168.1.234	GLPG143457205760
2	SIP	mos value between 3 to 4	Warning	2.00-4.00	3.39	0006@192.168.1.236	0006@192.168.1.234	GLPG143617205763
3	SIP	mos value between 3 to 4	Warning	2.00-4.00	2.77	0008@192.168.1.236	0008@192.168.1.234	GLPG143617205769
3	SIP	mos value between 1 to 2.5	Critical	1.00-2.50	2.36	0008@192.168.1.236	0008@192.168.1.234	GLPG143617205769
4	SIP	mos value between 3 to 4	Warning	2.00-4.00	3.48	0009@192.168.1.236	0009@192.168.1.234	GLPG143617205772
5	SIP	mos value between 3 to 4	Warning	2.00-4.00	3.30	0011@192.168.1.236	0011@192.168.1.234	GLPG14377205778
6	SIP	mos value between 3 to 4	Warning	2.00-4.00	2.77	0012@192.168.1.236	0012@192.168.1.234	GLPG143927205781
6	SIP	mos value between 1 to 2.5	Critical	1.00-2.50	2.31	0012@192.168.1.236	0012@192.168.1.234	GLPG143927205781
7	SIP	mos value between 3 to 4	Warning	2.00-4.00	2.27	0001@192.168.1.231	0001@192.168.1.237	GLPG13407127763982
7	SIP	mos value between 1 to 2.5	Critical	1.00-2.50	2.27	0001@192.168.1.231	0001@192.168.1.237	GLPG13407127763982
8	SIP	mos value between 1 to 2.5	Critical	1.00-2.50	1.47	0002@192.168.1.231	0002@192.168.1.237	GLPG13417127763987
9	SIP	mos value between 1 to 2.5	Critical	1.00-2.50	1.04	0003@192.168.1.231	0003@192.168.1.237	GLPG13425567763992

Figure: Alert Summary View

## Packet Data Analysis (PDA) – Registration Summary

- Provides the registration summary of each SIP registration including the user agent, registrar, status, registered time, expiry time, time to live, remaining time, and registration request delay (RRD), and Re-registration Attempts
- Provides graphical view of the active registrations and registration trace of each registration

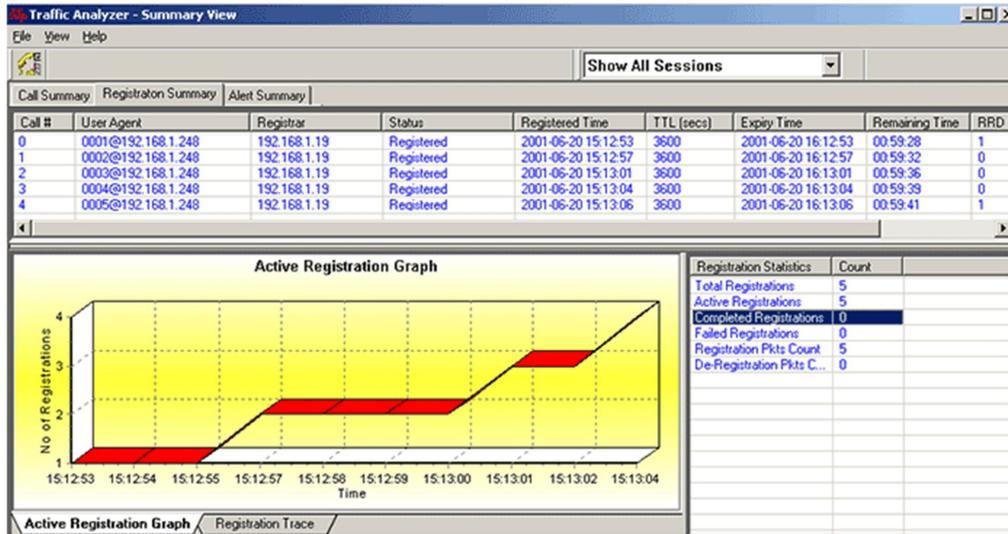


Figure: Registration Summary

## Enhanced Trace Saving Options

Users can control the captured trace files by saving the trace using different conventions such as trace files with user-defined prefixes, trace file with date-time prefixes, and slider control to indicate the total number of files, file size, frame count, or time limit. This feature also allows the captured frames to be saved into a trace file based on the filtering criteria set using display filter feature

The screenshot shows the 'Protocol Trace Saving Options' dialog box. It is divided into several sections:

- Using View Filter:** Radio buttons for 'All Frames (no filtering)' (selected) and 'Filtered Only (use view filter)'.
- Save Directory:** A text box containing 'C:\' and a folder icon.
- Save File Names:**
  - Sequential File Names:** Radio button selected. Includes a text box for 'file name prefix' (containing '123'), a 'number of digits' slider (set to 1), and a text box for 'file name suffix' (containing '.HDL').
  - Date/Time Formatted Names:** Radio button unselected. Includes a text box for 'file name prefix' (containing '%Y%M%D\_%H%I'), a 'file name suffix' text box (containing '.HDL'), and a label 'fileNamePrefix\_%Y%M%D\_%H%I\_fileNameCont'.
- Create a New File After the Specified Limit Has Been Reached:**
  - File Size Limit:** Radio button selected. Includes a text box for 'Limit Value' (containing '1000000') and a label 'Limit Value'.
  - Frame Count Limit:** Radio button unselected. Includes a text box for 'Limit Value' (containing '1000000').
  - Time Limit:** Radio button unselected. Includes a text box for 'Limit Value' (containing '1000000').
- Restrict or Recycle After N Files Options:** Includes a text box for 'N' (containing '2147483647') and radio buttons for 'Keep N Latest Files' (selected), 'Stop After N Files', and 'Unrestricted'.

Figure: Protocol Trace Saving Options for PoS Protocol Analysis

## Supported Protocol Standards

Available Standards	Supported Protocols	Specification Used
PPP	PPP	RFC 1331,1220,1333,1548,1661, 1570
PPP SIGTRAN	MultiPPP (PPP Multilink Protocol) Multiplexed PPP	RFC1717, RFC1990 RFC 3153
	CRTP	RFC 2508
	Cisco HDLC	<a href="http://www.protocols.com/pbook/bridge.htm#CISCOROUTER">http://www.protocols.com/pbook/bridge.htm#CISCOROUTER</a>
	CHAP (Challenge Handshake Authentication Protocol)	RFC1334 http
	IPHC (IP Header Compression)	RFC 2507, RFC 3544
	LCP (Link Control Protocol)	RFC1570, RFC1661
	NCP	RFC 801
	LQR (Link Quality Report)	RFC1333
	Multi-class extensions to PPP (MC MLPPP)	RFC2686
	PPP (Point-to-Point Protocol) over HDLC	RFC1662
	PPP-BPDU (PPP Bridge Protocol Data Unit)	RFC1638
	BCP (Bridging Control Protocol)	RFC 3518
	IPCP (IP Control Protocol)	RFC1332
	IPCP Extensions for Name Server Addresses	RFC 1877
	PPPMuxCP	RFC 3153
	ISDN H.225	H.225 Q.931 Layer
	SCTP	RFC 2960
	SUA (SCCP UA)	RFC 3868
	SNMP (V1, V2)	RFC 1157,1155,1902,3416,2863, 2578,3418,2011,2012 etc.
	SIP3261, MGCP, MEGACO, RTP, and RTCP	RFC 3261, RFC 3435, RFC 3015, RFC 2833, and RFC 3550
	H.263, H.245, and H.450	ITU-T H.263, ITU-T H.245, and ITU-T H.450.1 to H.450.12

## Buyer's Guide

Item No	Product Description
<a href="#">LTS205</a>	OC-3 / STM-1 PoS Protocol Analysis
<a href="#">LTS305</a>	OC-12 / STM-4 PoS Protocol Analysis

Item No	Related Software
<a href="#">LTS200</a>	OC-3 / STM-1 ATM Monitor, BERT, Tx/Rx Test, RAW
<a href="#">LTS300</a>	OC-12 / STM-4 ATM Monitor, BERT, Tx/Rx Test, RAW
<a href="#">LTS201</a>	OC-3 / STM-1 PoS Monitor, BERT, Tx/Rx Test, RAW
<a href="#">LTS301</a>	OC-12 / STM-4 PoS Monitor, BERT, Tx/Rx Test, RAW
<a href="#">LTS202</a>	OC-3 / STM-1 ATM and RAW Record / Playback
<a href="#">LTS203</a>	OC-3 / STM-1 PoS and RAW Record / Playback
<a href="#">LTS303</a>	OC-12 / STM-4 PoS and RAW Record / Playback
<a href="#">LTS204</a>	OC-3 / STM-1 ATM Protocol Analysis
<a href="#">LTS304</a>	OC-12 / STM-4 ATM Protocol Analysis
<a href="#">LTS206</a>	OC-3 / STM-1 UMTS Protocol Analysis
<a href="#">LTS306</a>	OC-12 / STM-4 UMTS Protocol Analysis



**GL Communications Inc.**

818 West Diamond Avenue - Third Floor, Gaithersburg, MD 20878, U.S.A

(Web) [www.gl.com](http://www.gl.com) - (V) +1-301-670-4784 (F) +1-301-670-9187 - (E-Mail) [info@gl.com](mailto:info@gl.com)

## Buyer's Guide (Contd.)

Item No	Related Hardware
<a href="#">LTS100</a>	Lightspeed1000™ - Dual OC-3/12 STM-1/4 PCIe Card
<a href="#">LTS105</a>	Lightspeed1000™ - Portable Dual OC-3/12 STM-1/4 USB Unit
LTS404	SFP, Single Mode
LTS405	SFP, Multimode
<a href="#">SA019a</a>	1 Gbps / 10 Gbps Fiber Optic Cable, Single-Mode, Duplex LC to Duplex LC
<a href="#">SA019b</a>	1 Gbps / 10 Gbps Fiber Optic Cable, Single-Mode, Duplex LC to Duplex SC
<a href="#">SA019c</a>	1 Gbps / 10 Gbps Fiber Optic Cable, Multi-Mode, Duplex LC to Duplex LC
<a href="#">SA019d</a>	1 Gbps / 10 Gbps Fiber Optic Cable, Multi-Mode, Duplex LC to Duplex SC
<a href="#">SA019e</a>	40G / 100G Fiber Optic Cable, Multi-Mode
<a href="#">SA019f</a>	40G / 100G Fiber Optic Cable, Single-Mode

**Note:** PCs which include GL hardware/software require Intel or AMD processors for compliance.

For more details, refer [PoS Protocol Analyzer](#) webpage.



**GL Communications Inc.**

818 West Diamond Avenue - Third Floor, Gaithersburg, MD 20878, U.S.A  
 (Web) [www.gl.com](http://www.gl.com) - (V) +1-301-670-4784 (F) +1-301-670-9187 - (E-Mail) [info@gl.com](mailto:info@gl.com)